


AS703

Wireless Handheld Microphone Kit

Quick Start Guide



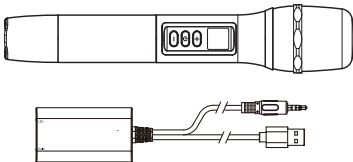


Please read this guide before using the product.


1. Unpacking

Before using this product, ensure the following items are included in the package. If any item is missing, please contact the retailer where the product was purchased.

- | | | |
|---|---------------------------------|----|
| ❶ | Wireless Microphone Transmitter | X1 |
| ❷ | Wireless Microphone Receiver | X1 |
| ❸ | USB Type-C Charging Cable | X1 |




2. Transmitter Overview

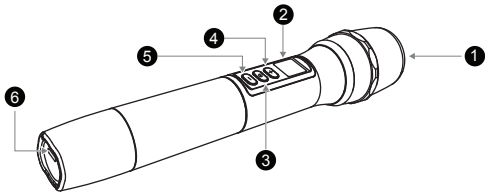


- | | |
|----------------------|----------------------------------|
| 1 Microphone Element | 4 Volume Up |
| 2 Status LED | 5 Volume Down |
| 3 Power | 6 USB Type-C Port (for Charging) |

3. Button Function Description



Item	Function
1 Power	Turn on: press and hold for 1 seconds. Turn off: press and hold for 2 seconds. Pairing to the receiver : briefly press twice.
2 Status LED	Indicates battery, pairing, and volume up/down statuses. Note: For volume up/down, the blue light flashes once.
3 Volume +	Once press to increase the volume level.
4 Volume -	Press once to decrease the volume level.

4. Receiver Overview

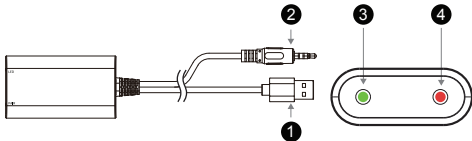

- 1 USB Connection** - Provides power when connected to a USB port.
- 2 3.5mm AUX cable** - Connect to a speaker or IFPD for audio signal.
- 3 LED Indicator** - Displays solid green light when connected
- 4 IR Receiving Point** - Used for pairing the transmitter with the receiver.


*.Note: The actual length of the USB and AUX cables is 50 cm. The cable illustrations in the documentation are for reference only and may not represent the actual cable length.

5-1. Connecting The USB Dongle (Scenario 1)

Connecting to a Speaker or Amplifier

1. Connect the 3.5mm audio cable to the AUX port of your speaker or amplifier.
2. Plug the USB dongle into an available USB port on the speaker to supply power.

Note: *If your speaker doesn't have a USB port, connect the USB dongle to an external USB power adapter or a power bank.*

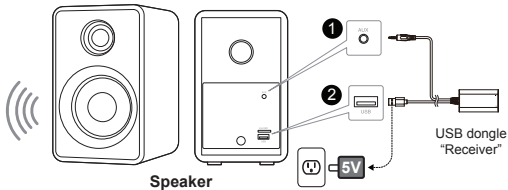

Power Warning!


Use only UL or CCC-certified power supplies with an output rating of 5V/0.5A DC. Using incompatible power supplies may pose safety risks.

*. The illustrations above are for reference purposes only

5-2. Connect The USB Dongle (Scenario 2)

Connecting USB dongle “Receiver” to an IFPD (Interactive Flat Panel Display)

1. Connect the supplied 3.5mm audio cable to the IFPD's AUX (Audio-In) port.
2. Plug the USB dongle into an available USB port on the IFPD to supply power.

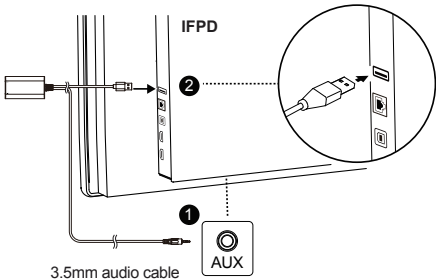


*. The illustrations above are for reference purposes only

6. Pairing The Transmitter And Receiver

1. Ensure the wireless microphone is turned on.
2. Position the microphone near the USB dongle's IR receiver until the LED stops flashing and shows a solid green light.

Note: If not paired with the receiver, the green light will flash for 10 seconds before turning solid green, indicating standby mode.


3. Once paired, hold the microphone and begin speaking. The wireless range is up to 10 meters.

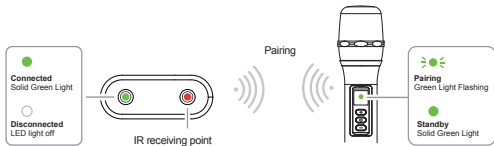

7. Pairing The Wireless Microphone (Scenario 2)


Note: If your IFPD already has a built-in wireless microphone receiver, follow the steps below to pair the wireless microphone.

1. Ensure the wireless microphone is powered on.
2. Place the wireless microphone's infrared transmitter close to the IFPD's front panel X-MIC receiver. Once paired, the green LED on the microphone will stop flashing and after 10 seconds, and the X-MIC receiver on the IFPD will display a solid blue LED.

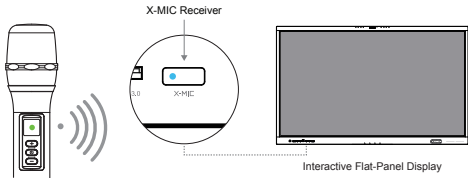


8. How to Charge

- **USB Charging:** Plug one end of the supplied USB cable into the Microphone's USB Type-C port and the other end into a USB power source.
- **Battery Life:** Up to 14 hours of wireless operation with a fully charged built-in 2000mAh battery.

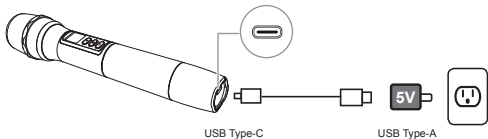

9. Battery Status

Note: Different colors and flashes indicate power, connection, and battery status.



Charging in Power On Status:

- ⚡ 🔴 ⚡ Low Battery: Red LED flashes
- Battery Charging: Solid Orange LED
- Full Battery: Solid Green LED

Charging in Power Off Status:

- ⚡ 🔴 ⚡ Low Battery: Red LED flashes
- ⚡ 🟠 ⚡ Battery Charging: Orange LED flashes
- Full Battery: Solid Blue LED

10. Safety Notes



Placement

- Please avoid placing the product in areas where direct sunlight can reach, near heating devices such as electric heaters, or other heat sources and strong light sources.
- Please avoid placing the product near devices with strong radiation.
- Please do not place the product in damp or liquid-splashed areas.

Temperature & Humidity

- Do not place this product near electric heaters or radiators.
- When moving the product from a low-temperature area to a high-temperature area, please allow it to sit for some time to ensure that any internal condensation dissipates before powering it on.
- The operating temperature of the product is 0°C – 40°C.
- Do not expose this display to rain, moisture, or areas near water.
- Please ensure indoor dryness and ventilation.